
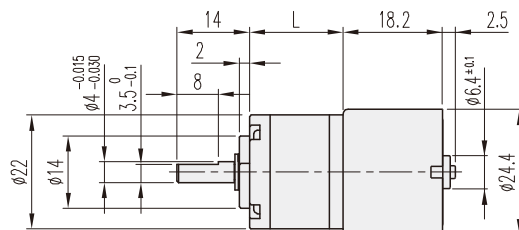


K22-TYPE

Planetary GEARHEAD

DIMENSIONS

K22-2418 BLDC SERIES



GEARHEAD LENGTH

RATIO	L	RATIO	L
1/4	14.4	1/198 ~ 1/455	25.35
1/14 ~ 1/19	18.05	1/742 ~ 1/1996	29
1/53 ~ 1/104	21.7		

BLDC MOTOR PERFORMANCE DATA

MODEL	ITEM	VOLTAGE (DC)	NO LOAD		AT MAX. EFF.		WEIGHT (g)	
			mA	rpm	gf-cm	mA		rpm
KB2418U1		12V	120	6200	25	250	4500	30
KB2418R2		24V	100	8700	18	150	7200	

AT MAXIMUM EFFICIENCY (K22-□□□□-KB2418□□)

GEAR	MODEL	KB2418U1 DC 12V		KB2418R2 DC 24V	
		rpm	kgf-cm	rpm	kgf-cm
1/0004		1125	0.09	1800	0.06
1/0014		321	0.29	514	0.2
1/0016		281	0.33	450	0.23
1/0019		237	0.39	379	0.27
1/0053		85	1	136	0.68
1/0062		73	1.1	116	0.8
1/0072		63	1.3	100	0.93
1/0084		54	1.6	86	1.1
1/0104		43	1.9	69	1.3
1/0198		22.7	3	36	2.3
1/0231		19.5	3	31	2.7
1/0270		16.7	3	26.7	3
1/0316		14.2	3	22.8	3
1/0370		12.1	3	19.5	3
1/0455		9.9	3	15.8	3
1/0742		6	3	9.7	3
1/1014		4.4	3	7.1	3
1/1249		3.6	3	5.7	3
1/1621		2.8	3	4.4	3
1/1996		2.3	3	3.6	3

- * 彩色齒輪比與電動機的旋轉方向相同。
- * 每個功能轉換，請運行處於停滯狀態的電機。
- * 速度控制器是調整槍式套房。

How to connect when speed control is not needed.

No - Color	Pin - Contents	Connection Method
1 - Black	GND	Connect GND and PWM to (-) power simultaneously
2 - Red	12V	Connecting to (+) power
3 - Yellow	1FG (9P / R)	6 pulses per rotation
4 - White	PWM	Connect GND and PWM to (-) power simultaneously
5 - Orange	CW/CCW	Default CCW rotation, CW rotation on (-) connection

* 連接不正確的電源 (+) (-) 時，請小心電機，以免造成損壞。

