

INDUCTION MOTOR

150W

□90mm-2POLES

LEAD WIRE TYPE

K9IS150F□-2P




SPECIFICATIONS

150W 연속정격, 2극

Model		Voltage (V)	Frequency (Hz)	Current (A)	Start T. (N*m/Kgf*cm)	Rated T. (N*m/Kgf*cm)	Speed (rpm)	Condenser (μF)
K9I□150FC-2P	단상	220	50	1.10	0.05	0.53	2700	8
					5.00	5.30		
			60	1.40	0.53	0.45	3200	
					5.30	4.50		
		230	50	1.15	0.54	0.53	2700	
					5.40	5.30		
60	1.45	0.57	0.45	3200				
		5.70	4.50					
K9I□150FH-2P	삼상	220	50	2.40	1.60	0.53	2700	-
					16.00	5.30		
			60	1.64	1.41	0.45	3200	
					14.10	4.50		
		230	50		0.57	0.53	2700	
					5.70	5.30		
60		0.57	0.45	3200				
		5.70	4.50					
K9I□150FM-2P		380	50	0.62	1.65	0.53	2700	-
					16.5	5.30		
		60	0.55	1.27	0.45	3200		
				12.7	4.50			

* □ : SHAFT 형상 (S : STRAIGHT)

DIMENSIONS & CONNECTION DIAGRAMS

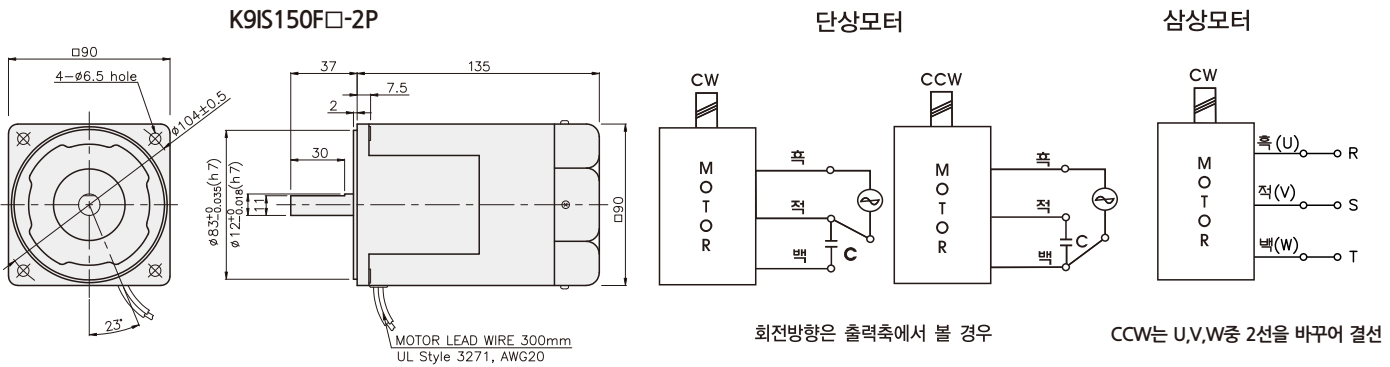

무게

PART	WEIGHT(kg)
MOTOR	3.10