

## INDUCTION MOTOR

**200W**

**□90mm-2POLES**

**LEAD WIRE TYPE**

INDUCTION MOTOR

K9IS200F□-2P




### SPECIFICATIONS

200W 연속정격, 2극

Model		Voltage (V)	Frequency (Hz)	Current (A)	Start T. (N*m/Kgf*cm)	Rated T. (N*m/Kgf*cm)	Speed (rpm)	Condenser (μF)			
K9I□200FC-2P	단상	220	50	1.37	0.55	0.71	2700	9			
			60	1.68	5.50	7.10					
			50	1.45	0.56	0.60	3200				
		60	1.72	5.60	6.00						
		K9I□200FH-2P	삼상	220	50	1.05	2.57		0.71	2700	—
					60	1.10	25.7		7.10		
50	1.11				2.21	0.60	3200				
60	1.10			22.1	6.00						
K9I□200FM-2P	삼상			380	50	0.62	2.77	0.71	2700	—	
					60	0.60	27.7	7.10			
		440	50	0.52	2.22	0.60	3200				
			60	0.52	22.2	6.00					
K9I□200FZ-2P	삼상	380	50	0.62	2.49	0.71	2700	—			
			60	0.60	24.9	7.10					
		440	50	0.52	1.94	0.60	3200				
			60	0.52	19.4	6.00					
K9I□200FZ-2P	삼상	380	50	0.52	2.20	0.71	2700	—			
			60	0.52	22.0	7.10					
		440	50	0.52	1.78	0.60	3200				
			60	0.52	17.8	6.00					

\* □ : SHAFT 형상 ( S : STRAIGHT )

### DIMENSIONS & CONNECTION DIAGRAMS

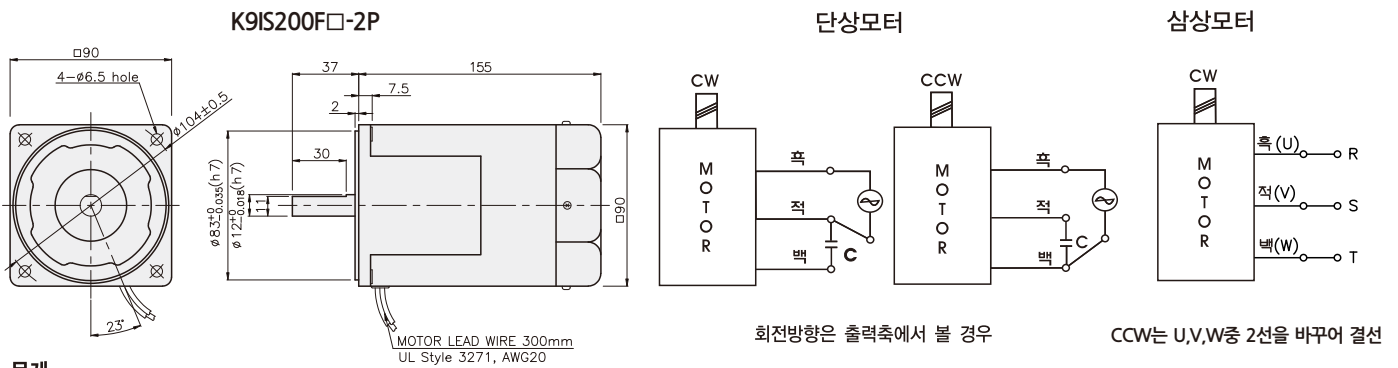

무게

PART	WEIGHT(kg)
MOTOR	3.88